



PERFORMANCE LIGHTING



NEW

FLUOSPOT LED



FLUOSPOT LED

design Silvia Paola Pennacchio



FLUOSPOT LED multi-functional compact LED ARRAY energy saving IP55 fittings suitable for indoor and outdoor installation, manufactured in technopolymer. With a variety of mounting accessories and lamp LED are ideal for small advertising and signage panels, garden and small area lighting, security lighting. Other mounting accessories include extension arms (500mm/1000mm), and telescopic tri-pod stand.

- Fibreglass reinforced polyamide body available in black or white.
- Anti-ageing dual foam silicone gasket factory CNC injected direct to cover bonding.
- Clear UV stabilized impact resistant polycarbonate cover.
- Polyamide mounting bracket with pivoting rotational rack joint and wiring terminal, provides quick and easy electrical connection.
- Reflectors in high purity anodized and polished aluminium provides a cover plate and support for control gear.
- Wall bracket in painted sheet steel complete with polyamide cover in colour matching body.
- Stainless steel external fixings.



FLUOSPOT PC LED

lampholder	W	class	IP	optic	wiring	Kelvin	↑	Cos ϕ $\geq 0,9$	80	85
1 LED	10 W	I	55	S	ETRC	4000	IK09 12J	•	06058280	06058485
1 LED	15 W	I	55	S	ETRC	4000	IK09 12J	•	06058680	06058785
1 LED	15 W	I	55	S	ETRC	5000	IK09 12J	•	06058380	06058585


FLUOSPOT KIT LED

lampholder	W	class	IP	optic	wiring	Kelvin	↑	Cos ϕ $\geq 0,9$	80	85
1 LED	10 W	I	55	S	ETRC	4000	IK09 12J	•	03006580	03006885
1 LED	15 W	I	55	S	ETRC	4000	IK09 12J	•	03006480	03006785
1 LED	15 W	I	55	S	ETRC	5000	IK09 12J	•	03006380	03006685





80	85	CLASS I	IP 55	IK 09 12J	F	KG max 1,7 kg	M20x1,5 Ø7±11 mm	H05RN-F 3G1,5 3x2,5mm ²
----	----	---------	-------	-----------	---	------------------	---------------------	---------------------------------------

Fluspot PC LED




Fluspot KIT LED

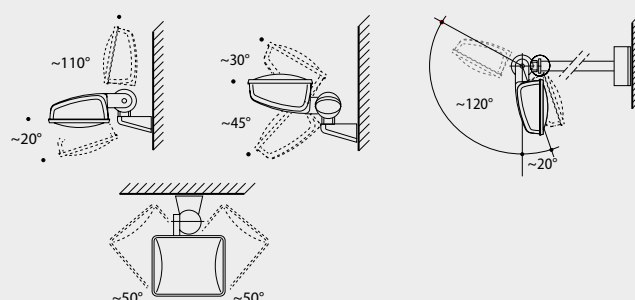




ACCESSORIES

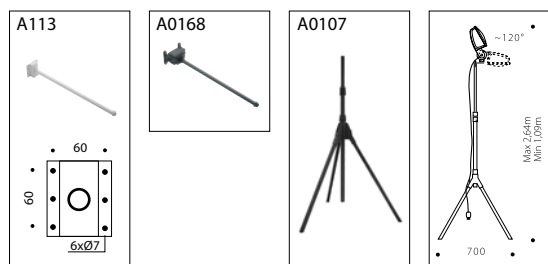

Code	Denomination	Colour	Description
14002680	A0168/500	80	Die cast aluminium connection box (IP54) and 50cm arm in steel painted in black. It allows connection of fittings in series.
14002785	A0168/500	85	Die cast aluminium connection box (IP54) and 50cm arm in steel painted in white. It allows connection of fittings in series.
14002880	A0168/1000	80	Die cast aluminium connection box (IP54) and 100cm arm in steel painted in black. It allows connection of fittings in series.
14002985	A0168/1000	85	Die cast aluminium connection box (IP54) and 100cm arm in steel painted in white. It allows connection of fittings in series.
14004011	A113/500	80	Extension arm available in 500 length finished black.
14005021	A113/500	85	Extension arm available in 500 length finished white.
14323013	A113/1000/R	80	Extension arm available 1000mm length finished black.
14324023	A113/1000/R	85	Extension arm available 1000mm length finished white.
14337011	A107/T	80	Adjustable steel telescopic tri-pod stand with polyamide joints.



	LED nominal colour temperature (K)	Typical LED CRI	N° LED	Nominal lumen output Tj 25°C	Real lumen output	Total POWER (LED + Driver)	Estimated life time at 70% Flux (h)
FLUSOPOT LED - 10 W	4.000	80	1	1.140	776	12,4	50.000
FLUSOPOT LED - 15 W	4.000	80	1	1.610	995	17,2	50.000
FLUSOPOT LED - 15 W	5.000	70	1	1.830	1.209	16,4	50.000

**PERFORMANCE
LIGHTING**

SBP® and **SBP URBAN LIGHTING**® are brands of
PERFORMANCE IN LIGHTING s.p.a.

via Provinciale, 57 - 24050 Ghisalba (BG) - Italia

info@sbp-pil.com

www.performanceinlighting.com

EXPORT DEPARTMENT

Tel. +39 0363 94 06 22

Fax +39 0363 94 06 99

euroexport@sbp-pil.com

worldexport@sbp-pil.com

UK - Performance in Lighting (UK) Limited

Imex Spaces Business Centre

Oxleasow Road, East Moons Moat

Redditch

Worcestershire B98 0RE

Tel. +44 (0) 1527 830439

Fax +44 (0) 1527 830440

info1@pil-uk.com